


SECURITY FILMS

Performance Condition	Protection Level	Hazard Level	Description of Window Glazing Response
1	Safe	None	Glazing does not break. No visible damage to glazing or frame.
2	Very High	None	Glazing cracks but is retained by the frame. Dusting or very small fragments near sill or on floor.
3a	High	Very Low	Glazing cracks. Fragments enter space and land on floor no further than 3.3 ft. from the window.
3b	High	Low	Glazing cracks. Fragments enter space and land on floor no further than 10 ft. from the window.
4	Medium	Medium	Glazing cracks. Fragments enter space and land on floor and impact a vertical witness panel at a distance of no more than 10 ft. from the window at a height no greater than 2 ft. above the floor.
5	Low	High	Glazing cracks and window system fails catastrophically. Fragments enter space impacting a vertical witness panel at a distance of no more than 10 ft. from the window at a height greater than 2 ft. above the floor.

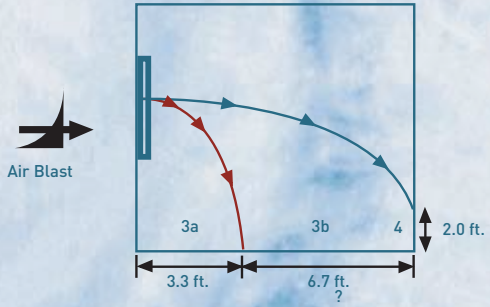

The chart and graph above show the standards generally accepted for GSA approval of security films. All of our installers are trained to help your home or business achieve a level 3B performance rating or higher for blast mitigation.

Ask how Metro Georgia Window Films, Inc. can improve your

SAFETY and SECURITY TODAY



Metro Georgia Window Films, Inc.
 Blast Mitigation Specialists
 Phone / Fax: 404-240-0032
www.gawindowfilms.com